


**DeltaOHM**

Member of GHM GROUP

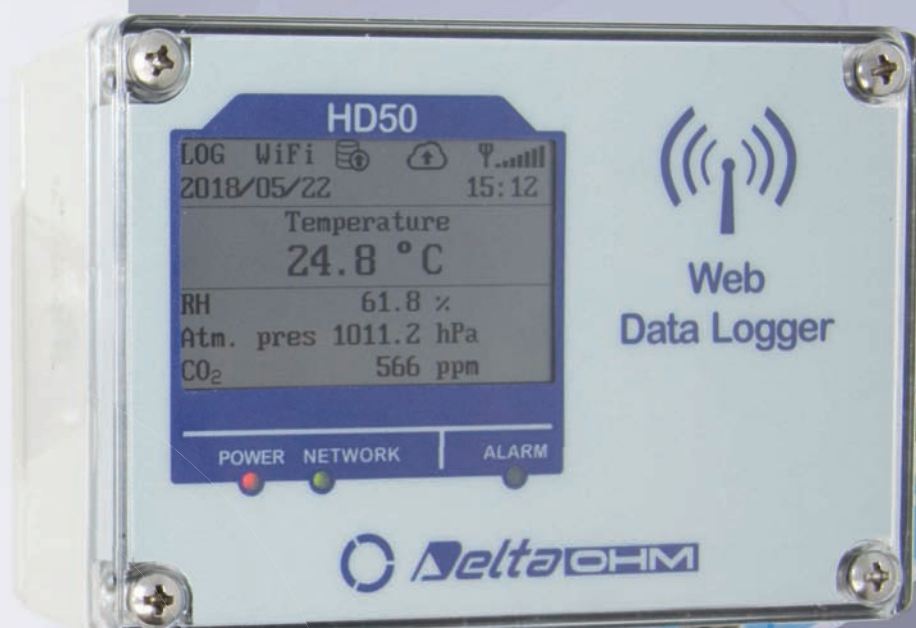

## HD50 SERIES

WEB DATA LOGGER

## Product information Web data logger



## What is a logger?

A measuring device that can store the measurements in a memory. This memory can be located locally (in the instrument) in a database (on a PC or server) or in the cloud.

## What is the HD50 logger serie?

It is a logger serie that supports:

- Ethernet with RJ45 connector
- Wi-fi

Any office building has LAN/WLAN network: this means that this logger can be applied everywhere without any further installation or adjustment.

## Why did we develop the HD50?

With the HD50 it is possible to start from 1 logger and extend it to a practically unlimited network of loggers. The HD50 settings can be opened from a web browser, as it has a built-in webserver. This way it is also possible to monitor the actual measurements.

Delta OHM already has the HD35 serie, based on RF communication. In some cases when networks are very wide or complex or divided into more than 1 building, a mix of cabled, WiFi and Radio Frequency loggers can be the best solution. The HD50 series have the possibility to be integrated in such hybrid networks.



## Product information Web data logger



## Where to use this device?

Any indoor place where a user is interested in seeing measurements 'over time':

- a warehouse with goods that need to be stored in a controlled environment;
- electronics that need to be stored with controlled humidity circumstances;
- pharmaceutical products or medicines that need to be controlled in temperature;
- an office building where comfort conditions are extremely important for people working;
- a frozen food storage where it is important to get an alarm when the temperature gets too high;
- in food industry where regulations are applied to monitor the temperature and to save the data to be able to provide this data when authorities ask for it.

There are many applications where it is important to measure and save the measurement information.


## What benefits do this logger series have?

- ✓ Easy to use: it can be directly accessed by a web browser.
- ✓ It can be used stand alone or in networks with hundreds of loggers.
- ✓ Additional software for all solutions: database locally on PC, database on local server, cloud based.
- ✓ Wide range of standard sensors (°C / RH / LUX / Atm / CO<sub>2</sub>).
- ✓ It can support practically 'any signal': universal inputs make it possible to integrate any transmitter with standard output.
- ✓ Optional software available for CFR21part11 (pharmaceutical market).
- ✓ The logger can send an email alarm when a value is higher or lower than the set threshold.

## Product information Web data logger

### Connectivity

The data loggers can be connected to a local network via the **Wi-Fi** or **Ethernet** interface

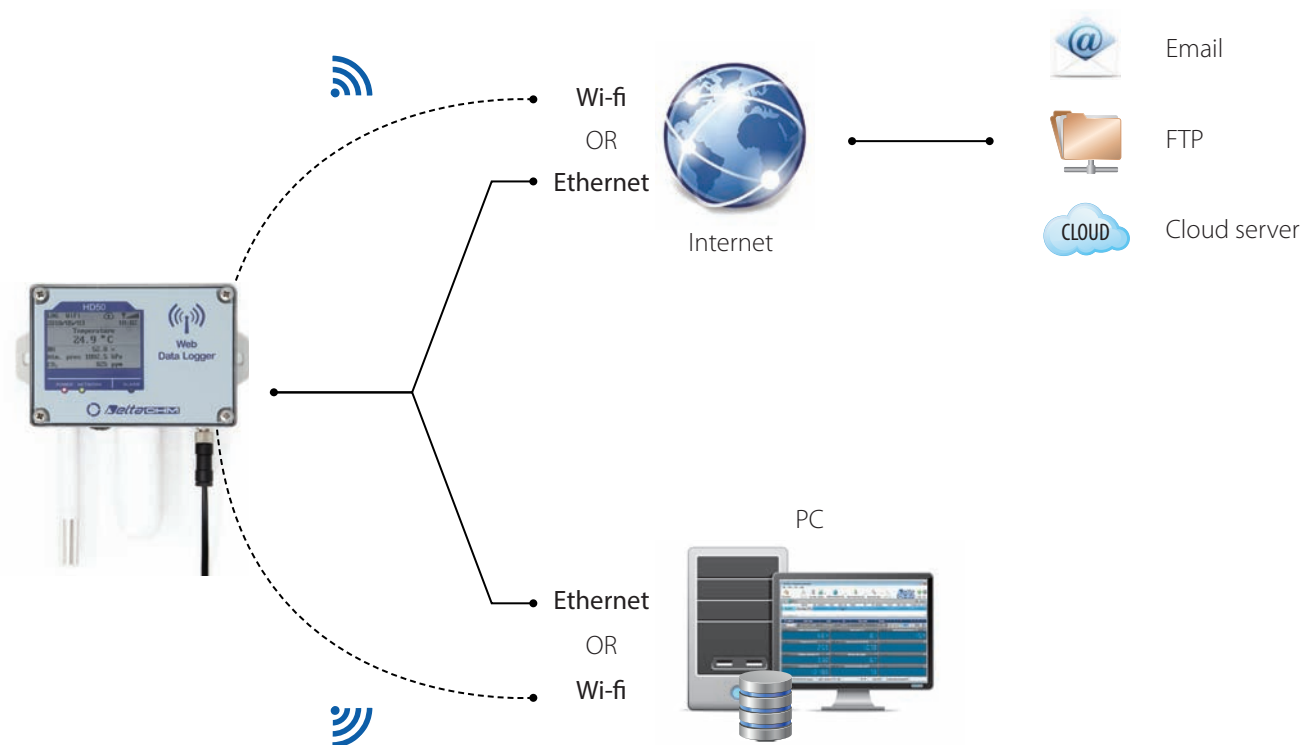

### Logging

A measuring interval and a logging interval can be set inside the data logger. The stored value is the average of the measures acquired in the logging interval. The acquired data are stored in the internal memory and sent via Internet (if the data logger is connected to a local network with Internet connection). When the data logger memory is full, it can be chosen to stop the logging or to continue overwriting the older data (cyclic logging). It is possible to log all the available quantities or, in order to increase the memory capacity, only the quantities of interest.

### Alarms

For each detected quantity, two alarm thresholds can be set by the user. The exceeding of a threshold is signaled acoustically by means of the internal buzzer, visually by lighting the alarm LED on the front panel and remotely by sending alarm **e-mails**. An alarm hysteresis and a delay in the generation of the alarm can be configured for each detected quantity.

## Product information Web data logger

### Integrated Web Server

Thanks to the integrated web server, you can configure the data logger and view the real time measurements from any PC, tablet or smartphone. These have to be connected to the same local network of the data logger by simply using a web browser and typing the IP address of the data logger, without the need to install specific software. You can see the measurements in the form of a graph or in a table.



Web server: monitor of measurements with CO<sub>2</sub> measurement in alarm



Web server: graph of measurements

### Cloud

Thanks to the integrated web server, it is possible to directly connect data to the logger and display the actual measurement. The data logger can automatically send, at regular intervals, the data to an HTTP server, and in particular to the Delta OHM portal **www.deltaohm.cloud**. The data sending interval is configurable.




Cloud: viewing measurements with a Web browser from anywhere in the world by using mobile devices (tablet, smartphone, notebook)


## Product information Web data logger

Multiple devices can be connected to the same local network, either via **Wi-Fi** (through a router or Wi-Fi access point) or via **Ethernet**. The data of all the devices connected to the network can be collected into the same database and can be viewed with a "Cloud" service or can be downloaded via e-mail or FTP.

Example of a hybrid network (Wi-Fi + ETHERNET) with multiple data loggers

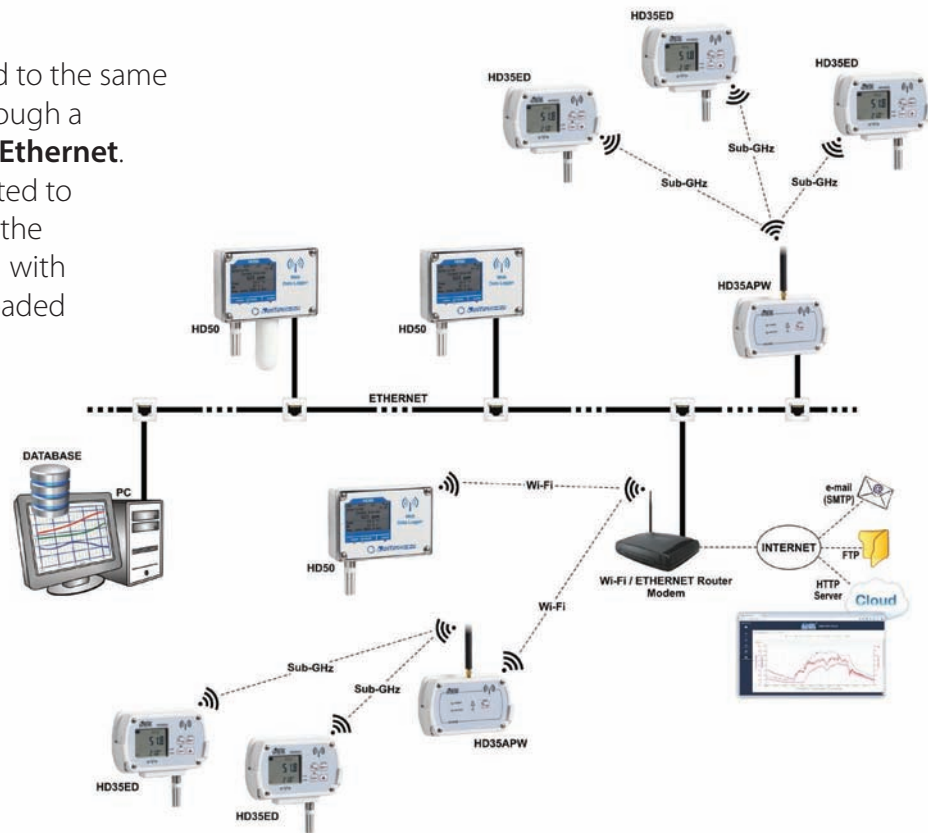


## PC Application Software

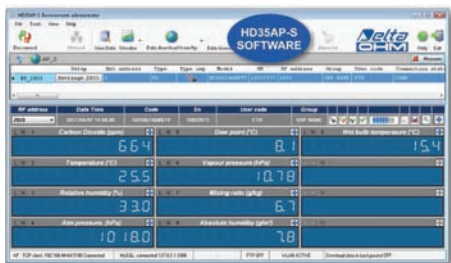

The PC software **HD35AP-S** supplied with the data logger allows:

- Configuring
- Viewing the real time measurements, both graphically and numerically
- Downloading the data in a database automatically at regular intervals or upon user request

HD35AP-S software: viewing the real time measurements

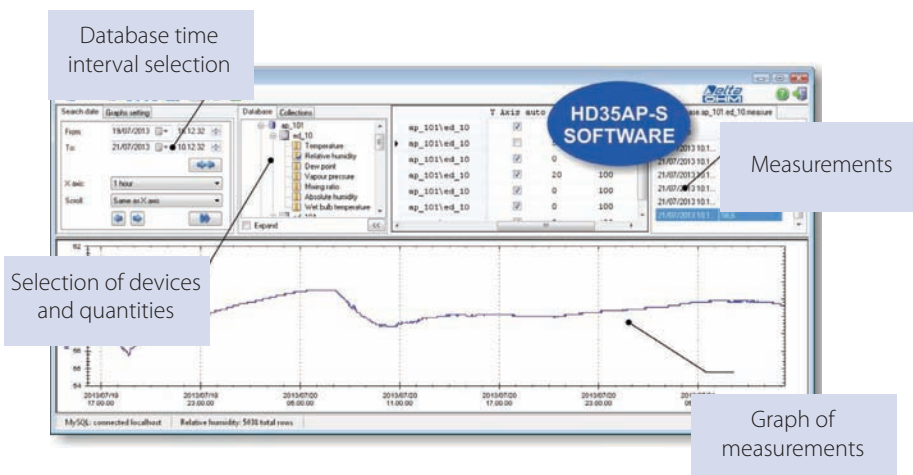

The software HD35AP-S is applied to configure the datalogger and can be used for simple network. For more extended networks use HDServer1



HD35AP-S software: database

## Product information Web data logger



### HDServer1

The HDServer1 software allows receiving, viewing and entering into a database the measurements automatically transmitted by loggers. Differently from the HD35AP-S, it supports multiple and simultaneous TCP/IP connections with many HD50 and HD35APW. An IP scanner functionality allows to easily identify and add all devices available on the network. The software consists of two parts that work independently:

- The Server part, which receives and enters in the database the data coming from the devices.

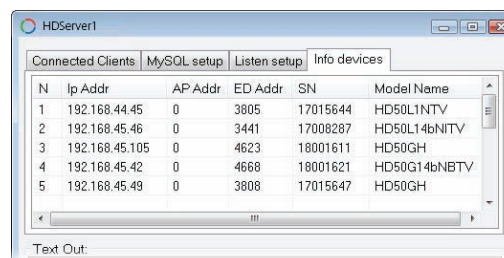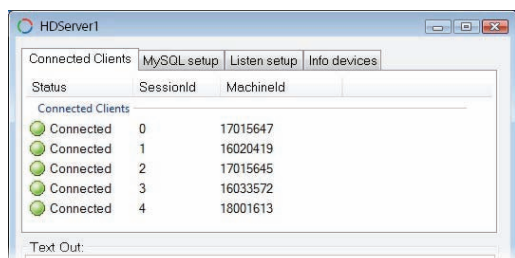


- The Viewer part, which displays the data of the database on the PC monitor

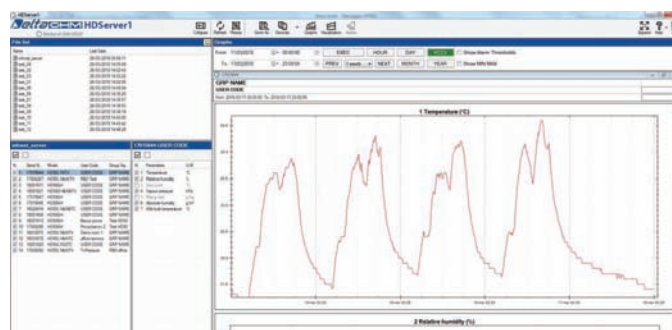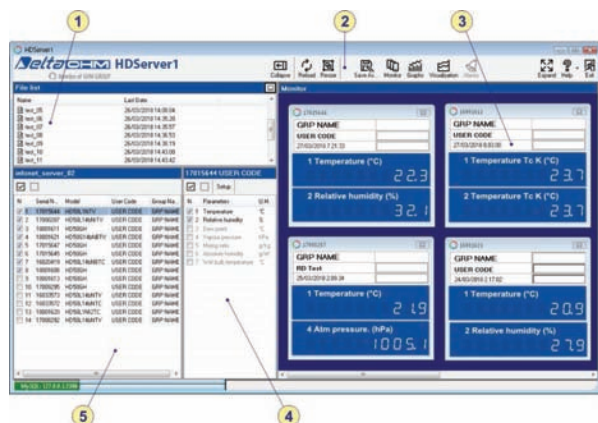

Viewer function

1. List of saved visualization
2. Toolbar
3. Measurement panels of the "Visualization" selected in the list of "Visualizations"
4. List of the quantities of the device selected in the list of devices
5. List of devices belonging to the selected visualization.

The software can be installed in multiple PCs. The Server part is normally active in only one PC, while the Viewer part can be active simultaneously in several PCs.

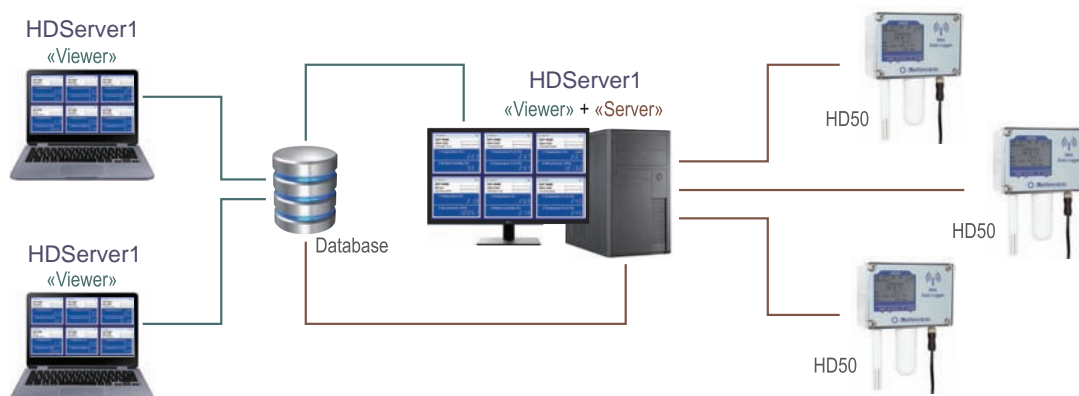

## Product information Web data logger

### CFR21 Option

In addition to the features of the basic softwares, the **HD35AP-CFR21** option allows the protection of recorded data and configuration in response to **FDA 21 CFR part 11** recommendations. In particular:

- o The traceability of activities (audit trail) performed with the software: which users are connected and what changes are made to the configuration of the data logger.
- o The management of users access for the data logger configuration and viewing of data in the database. Each user can be assigned a different password for using the software. Three levels of access are available (Administrator, Super-user and standard User). For each level, the allowed operations can be defined.

HD35AP-CFR21 option:  
users permissions



**Users management**

**Setup user login**

**HD35AP-CFR21**

☒ The password expires every  days  
☒ If the password is not correct, block the account after  attempts  
☒ Minimum password length  characters

☒ Follow the recommendations of FDA CFR21 Part 11

**User list**

| Id | Registration Date   | Login       | Description          | Status | Name   | Last Name | e-mail    | Position      |
|----|---------------------|-------------|----------------------|--------|--------|-----------|-----------|---------------|
| 7  | 11/11/2015 15:54:39 | Admin       | System administrator | Active | Name 1 | Surname 1 | Address 1 | Administrator |
| 8  | 11/11/2015 15:55:00 | Superuser A | Superuser A          | Active | Name 2 | Surname 2 | Address 2 | Superuser     |
| 10 | 11/12/2015 15:24:37 | Superuser B | Superuser B          | Active | Name 3 | Surname 3 | Address 3 | Superuser     |
| 11 | 11/12/2015 15:26:19 | User A      | User A               | Active | Name 4 | Surname 4 | Address 4 | User          |
| 12 | 11/12/2015 15:26:59 | User B      | User B               | Active | Name 5 | Surname 5 | Address 5 | User          |
| 13 | 11/12/2015 15:27:47 | User C      | User C               | Active | Name 6 | Surname 6 | Address 6 | User          |






The HD35AP-CFR21 option works with USB hardware key connected to any PC belonging to the same local network of the PC in which the HD35AP-S software is installed.

*Note: if the HD35AP-CFR21 option is used, the data logger integrated web server allows only viewing the measurements, but not the data logger configuration, because the settings changed via web server can not be traced.*

## Product information Web data logger







## Available HD50... series models

In order to highlight the physical quantities measured by the data loggers, the ordering codes include some identification characters for the various quantities. (see legend below)

|                     | MEASURES   |       |   |   |   |   | INPUTS                                   |                              | OPTIONAL LCD |                   |
|---------------------|--|-------|---|---|---|---|--|------------------------------|--------------|-------------------|
| Model               |   |       |  |  |  |  | Number of M12 connectors                 | Built-in sensors             | L            | G                 |
|                     | NTC10K   | Pt100 | RH  | Patm  | CO <sub>2</sub>   | Lux   |  |                              | Custom       | Graphic           |
| HD50 N/1 TC         | •  |       |   |   |   |   | 1  |                              | •            | •                 |
| HD50 N/2 TC         | •  |       |   |   |   |   | 2  |                              | •            | •                 |
| HD50 N/3 TC         | •  |       |   |   |   |   | 3  |                              | •            | •                 |
| HD50 N TV           | •  |       |   |   |   |   |  | •                            | •            | •                 |
| HD50 1N TC          | •  |       | •   |   |   |   | 1  |                              | •            | •                 |
| HD50 17P TC         |  | •     | • <sup>(*)</sup>  |   |   |   | 1  |                              | •            | •                 |
| HD50 1N TV          | •  |       | •   |   |   |   |  | •                            | •            | •                 |
| HD50 14bN TV        | •  |       | •   | •   |   |   |  | •                            | •            | •                 |
| HD50 14bN TC        | •  |       | •   | •   |   |   | 1  | Patm                         | •            | •                 |
| HD50 14b7P TC       |  | •     | • <sup>(*)</sup>  | •   |   |   | 1  | Patm                         | •            | •                 |
| HD50 1NB... TV      | •  |       | •   |   | •   |   |  | •                            | •            | •                 |
| HD50 14bNB... TV    | •  |       | •   | •   | •   |   |  | •                            | •            | •                 |
| HD501NI... TCV      | •  |       | •   |   |   | •   | 1  | T/RH                         | •            | •                 |
| HD5014bNI... TCV    | •  |       | •   | •   |   | •   | 1  | T/RH/Patm                    | •            | •                 |
| HD501NB...I... TCV  | •  |       | •   |   | •   | •   | 1  | T/RH/CO <sub>2</sub>         | •            | •                 |
| HD5014bNB...I...TCV | •  |       | •   | •   | •   | •   | 1  | T/RH/CO <sub>2</sub><br>Patm | •            | •                 |
| HD50GH              | Transmitters with 0÷20 mA, 4÷20 mA, 0÷50 mV, 0÷1 V or 0÷10 V output<br>Pt100 / Pt1000 sensors, thermocouples K, J, T, N, E<br>Sensors with potentiometric output |       |   |   |   |   | 4 terminal header inputs (See picture 1) |                              |              | • <sup>(**)</sup> |

(\*) RH sensor extended operating temperature range (-40...+150 °C).

(\*\*) The model with terminal header inputs always has the graphic display (not available without display).

|   |   |   |   |
|---|---|---|---|
|   | 1 = Humidity  |  | 7P = Temperature with Pt100/Pt1000 sensor   |
|   | 4b = Atmospheric pressure (barometer)   |  | B = Carbon dioxide (CO <sub>2</sub> ) low range (0...5,000 ppm)<br>B2 = Carbon dioxide (CO <sub>2</sub> ) high range (0...10,000 ppm) |
|  | N = Temperature with NTC10K sensor<br>(N/1 = 1 channel, N/2 = 2 channels, N/3 = 3 channels) |  | I = Illuminance low range (0...20,000 lux)<br>I2 = Illuminance high range (0...200,000 lux)   |

To indicate the fixed probe or the probe with cable, the following indications are used:

**TC** = Probe with cable (M12 connector)

**TV** = Fixed vertical probe without cable

**TCV** = Fixed sensors + photometric probe with cable

The data loggers are also available with **custom** (option **L**, except for the model HD50H) or **graphic** (option **G**) LCD.



Graphic LCD



Custom LCD

LEDs indicate the status of power supply, LAN/WLAN local network connection and alarm

Product information Web data logger

Ordering codes

HD50...

**TYPE OF LCD:**  
**Blank** = without LCD (not available for HD50H)  
**L** = with custom LCD (not available for HD50H)  
**G** = with graphic LCD

**MEASURED QUANTITIES:**  
**1** = humidity  
**4b** = atmospheric pressure (Barometer)  
**N** = temperature NTC10K sensor:  
**N/1**=1 channel, **N/2**=2 channels, **N/3**=3 channels  
**7P** = temperature Pt100 sensor  
**B** = carbon dioxide (CO<sub>2</sub>): **B**=low range, **B2**=high range  
**I** = illuminance: **I**=low range, **I2**=high range  
**Blank** = standard analog sensors


**PROBE TYPE:**  
**H** = inputs for standard analog sensors  
**TC** = probe with cable  
**TV** = fixed vertical probe without cable  
**TCV** = fixed sensors + photometric probe with cable

Technical Specifications

|                                    |   |
|------------------------------------|---|
| Measuring interval                 | 1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min   |
| Logging interval                   | 1, 2, 5, 10, 15, 30 s / 1, 2, 5, 10, 15, 30, 60 min   |
| Internal memory                    | Circular management or stop logging if full.<br>The number of samples that can be stored depends on the number of quantities selected for logging (see the next table). |
| Interfaces                         | Wi-Fi (IEEE 802.11b/g/n) and Ethernet (RJ45 connector)  |
| Protocols                          | Proprietary, MODBUS TCP/IP, SMTP, FTP, HTTP, NIST   |
| Wi-Fi security settings            | WEP64, WEP128, WAP, WAP2  |
| Alarm                              | Acoustic by means of the internal buzzer, LED on the front panel, sending of e-mails.   |
| Power supply                       | External 7...30 Vdc (no internal battery)   |
| Power consumption                  | 40 mA @ 24 V / 80 mA @ 12 V   |
| Display                            | Optional custom or graphic LCD  |
| LED indicators                     | Power supply, Network connection (LAN/WLAN) and Alarm   |
| Operating temperature and humidity | -20...+70 °C / < 100%RH non-condensing  |
| Housing                            | Material: Polycarbonate<br>Dimensions: 130 x 90 x 40 mm (156 x 90 x 44 mm with flanges)<br>Protection degree: IP 54 (with protective cap on RJ45 connector)             |
| Weight                             | 300 g approx.   |
| Installation                       | Indoor wall mount indoor  |

Installation

Wall mount installation by using the appropriate **optional** flanges to be fixed on the back of the housing.

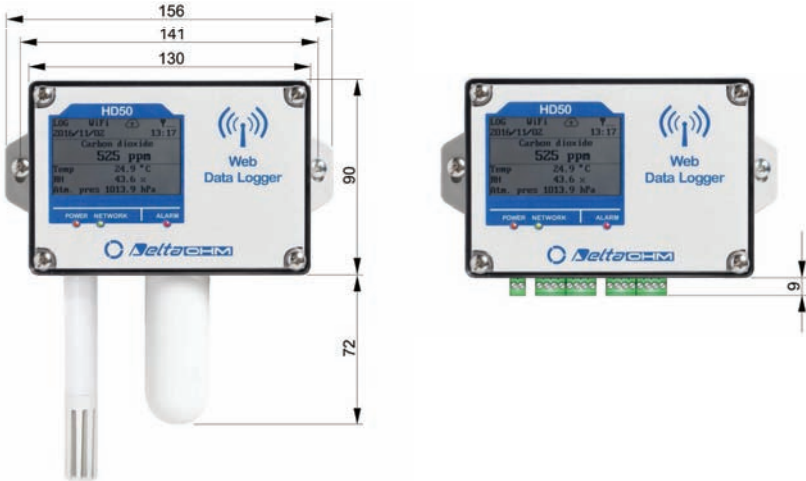



## Product information Web data logger



### Headquarter

GHM Messtechnik GmbH  
**GHM GROUP CORPORATE**  
Schloßstraße 6  
88453 Erolzheim | GERMANY  
Phone +49 7354 937233-0  
info@ghm-group.de  
www.ghm-group.de

### Centers of Competences

GHM Messtechnik GmbH  
**GHM GROUP – Greisinger**  
Hans-Sachs-Straße 26  
93128 Regensburg | GERMANY  
Phone +49 9402 9383-0  
info@greisinger.de | www.greisinger.de

GHM Messtechnik GmbH  
**GHM GROUP – Honsberg**  
Tenter Weg 2-8  
42897 Remscheid | GERMANY

GHM Messtechnik GmbH  
**GHM GROUP – Martens**  
Kiebitzhörn 18  
22885 Barsbüttel | GERMANY

GHM Messtechnik GmbH  
**GHM GROUP – Imtron**  
Carl-Benz-Straße 11  
88696 Owingen | GERMANY

Delta OHM S.r.l. a socio unico  
**GHM GROUP – Delta OHM**  
Via Marconi 5  
35030 Caselle di Selvazzano  
Padova (PD) | ITALY  
Phone +39 049 8977150  
info@deltaohm.com  
www.deltaohm.com

Valco srl  
**GHM GROUP – VAL.CO**  
Via Rovereto 9/11  
20014 S. Ilario di Nerviano  
Milano (MI) | ITALY  
Phone +39 0331 53 59 20  
valco@valco.it  
www.valco.it

### GHM GROUP International

**Austria**  
GHM Messtechnik GmbH  
Office Austria  
Breitenseer Str. 76/1/36  
1140 Vienna | AUSTRIA  
Phone +43 660 7335603  
a.froestl@ghm-messtechnik.de

**Brazil & Latin America**  
GHM Messtechnik do Brasil Ltda  
Av. José de Souza Campos, 1073, cj 06  
Campinas, SP  
13025 320 | BRAZIL  
Phone +55 19 3304 3408  
info@grupoghm.com.br

**Czech Republic/Slovakia**  
GHM Greisinger s.r.o.  
Ovci hájek 2/2153  
158 00 Prague 5  
Nove Butovice | CZECH REPUBLIC  
Phone +420 251 613828  
Fax +420 251 612607  
info@greisinger.cz | www.greisinger.cz

**Denmark**  
GHM Maaletchnik ApS  
Maarslet Byvej 2  
8320 Maarslet | DENMARK  
Phone +45 646492-00  
Fax +45 646492-01  
info@ghm.dk | www.ghm.dk

**France**  
GHM GROUP France SAS  
Parc des Pivoles  
9 Rue de Catalogne  
69150 Décines-Charpieu (Lyon) | FRANCE  
Phone +33 4 72 37 45 30  
a.jouanolou@ghm-group.fr

**India**  
GHM Messtechnik India Pvt Ltd.  
209 | Udyog Bhavan | Sonowala Road  
Gurgaon (E) | Mumbai - 400 063  
INDIA  
Phone +91 22 40236235  
info@ghmgroup.in | www.ghmgroup.in

**Italy** for Greisinger & Delta OHM  
GHM GROUP – Delta OHM  
Via Marconi 5  
35030 Caselle di Selvazzano  
Padova (PD) | ITALY  
Phone +39 049 8977150  
a.casati@ghm-messtechnik.de

**Italy** for Honsberg, Martens, Valco  
GHM GROUP – Valco  
Via Rovereto 9/11  
20014 S. Ilario di Nerviano  
Milano (MI) | ITALY  
Phone +39 0331 53 59 20  
alessandro.perego@valco.it

**Netherlands**  
GHM Meettechnik BV  
Zeeltweg 30  
3755 KA Eemnes | NETHERLANDS  
Phone +31 35 53805-40  
Fax +31 35 53805-41  
info@ghm-nl.com | www.ghm-nl.com

**South Africa**  
GHM Messtechnik SA (Pty) Ltd  
16 Olivier Street  
Verwoerdpark, Alberton 1453  
SOUTH AFRICA  
Phone +27 74 4590040  
j.grobler@ghm-sa.co.za

...and more than  
**100 qualified distributors!**



Visit us at: **www.ghm-group.de**